

MULTI-PURPOSE SHELVING

CHARACTERISTICS

STRUCTURE

UPRIGHTS	<p>Materials: Steel T-shaped uprights, section 35 x 35 mm</p> <p>Steel thickness: 1.25 mm</p> <p>Pads: In anti-shear plastic</p> <p>Finish: Epoxy powder finish, or galvanised</p> <p>Other: Cruciform braces provide added stability</p>
----------	--

INTERNAL FITTINGS

SHELF
(included and/or optional)

Materials: Metal (painted or galvanised)

Thickness: 30 mm

Assembly: Interlocking parts

Maximum load per shelf: (evenly distributed):
L 900 mm - 120 kg / L 1200 - 80 kg

Shelf adjustment & positioning Shelves adjustable in 25 mm steps. Minimum between 2 shelves: 75 mm


Optional: set of 2 additional shelves

Other: Can accommodate suspended files

Height (in mm)	2000		2500	
Width (in mm)	900	1200	900	1200
Number of shelves	5 or 6		7 or 8	

H 2000	H 2500
--------	--------

Overview

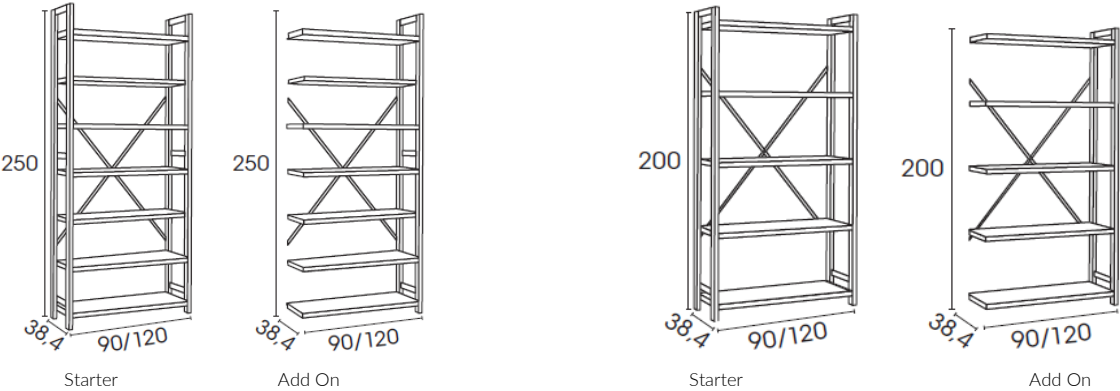

Starter unit

OVERALL DIMENSIONS (in mm)		
Height	Width	Depth
2000	965	384
	1265	
OVERALL DIMENSIONS (in mm)		
Height	Width	Depth
2500	965	384
	1265	

Add-on unit

OVERALL DIMENSIONS (in mm)		
Height	Width	Depth
2000	930	384
	1230	
OVERALL DIMENSIONS (in mm)		
Height	Width	Depth
2500	930	384
	1230	

RINGBINDER CAPACITY & USEFUL DIMENSIONS

CROSS BRACES

Width between uprights		
	900	1200
Useful width between uprights	925	1225