

CHARACTERISTICS

SHELL

<p>SIDE BACK PLINTH</p>	<p>Materials: Particle board panels covered on both sides with melamine overlay Density: 620 - 690 kg/m³ Thickness: 19 mm</p> <p>Adjustable stabiliser feet: Plinth with adjustable stabiliser feet to screw in the inserts M10 4 adjustable stabiliser feet (L. 800 mm) 5 adjustable stabiliser feet (L. 1000 mm) 6 adjustable stabiliser feet (L. 1200 mm) Adjustment through 15 mm Plinth: Useful load when spread out or evenly distributed: 50 kg</p> <p>Assembly: cam lock nuts located on pin</p>
<p>DECORATIVE TOP</p>	<p>Materials: Melamine bonded particle board panels, 2 decorative faces Density: 600 - 670 kg/m³ Thickness: 25 mm (except low module and partition unit = 19 mm) Finish: - Matching the cabinet body</p> <p>Structural decorative top</p>
<p>PANEL EDGE BANDING</p>	<p>Materials: ABS Thickness: 2 mm (for the tops) or 0.8 mm for other parts Finish: Same as shell (except for Maritime pine N8 which comes with plywood edge banding)</p>
<p>BLACK VELVET MK - DETAILS</p>	<p>MK: Black soft-touch matt finish melamine with a high-quality multi-layer coating. Panel density 600 to 620 kg/m³. Flat Black ABS edge banding (1 mm thick).</p> <p>Details: Top of H. 735 mm (desk-height) cupboards/bookcases in Black velvet MK. Top of H. 1135/1335/2021 mm cupboards/bookcases, and shells and doors of all cupboards/bookcases in Black melamine N9.</p>

OPENING MECHANISM




<p>SWING DOORS</p>	<p>In melamine:</p> <p>Materials: Particle board panels covered on both sides with melamine overlay Density: 620 - 690 kg/m³ Thickness: 19 mm</p> <p>Hinge: With integrated damping, opening 100° Lock mechanisms: 1-point lock for small and medium doors, 2-point lock with 2 locking rods for large doors. Optional master key for all doors Lock with 2 keys (one capped and folding). H. 735 / H. 1135 / H 735 cm - all widths: 4 hinges H. 2021 mm - L. 800 & 1000 mm: 6 hinges H. 2021 mm - L. 1200 mm: 8 hinges Handle: in aluminium with anodised silver finish - spacing 96 mm - Dimensions: 136 x 25 mm</p>
------------------------	---



CHARACTERISTICS

<p>SWING DOORS</p>	<p><u>In glass:</u></p> <p>Materials: Toughened safety glass Thickness: 6 mm Hinge: Standard hinge - Opening angle 110° Chromed for cupboards with aluminium, black and white body. 3 hinges for high door, 2 hinges for medium door, 1 hinge for low door Lock: no lock</p> <p>Handles: Centre-to-centre distance 96 mm - Dimensions: 136 x 25 mm. Choice of 3 colours: Aluminium with an anodised silver finish, Black epoxy (RAL 9005) or White epoxy (RAL 9010)</p>
<p>SLIDING DOORS</p>	<p><u>In melamine:</u></p> <p>Materials: Particle board panels covered on both sides with melamine overlay Density: 620 - 690 kg/m³ Thickness: 19 mm</p> <p>Rail: Aluminium rail (W1000 & W1200 mm) for cupboards of height ≥ 735 mm, ABS rail (W1650 mm) for counter-top cabinets. End stop and two plastic noise dampers Cupboards in Black finish come with Black rails Lock mechanisms: Push lock for sliding door Handle type: Profiled metal grip handles running the length of the cupboard door, in a lacquered epoxy finish. Choice of 3 colours: Aluminium grey (RAL 9006), Black (RAL 9005) or White (RAL 9010)</p> <hr/> <p><u>In Altuglas® PMMA:</u> Only for low storage units H. 552 mm and countertop modules for room divider units</p> <p>Materials: Altuglas® PMMA: Thickness: 4 mm Handle: Circular grip, chromed finish</p>

INTERNAL FITTINGS

<p>SHELVES</p>	<p><u>Melamine shelves for W. 800/1000 mm bookcases and cupboards (swing & sliding door versions)</u></p> <p>Materials: Particle board panels covered on both sides with melamine overlay Density: 600 - 690 kg/m³ Thickness: 19 mm for W. 800 mm and 25 mm for W. 1000 mm Adjustment: adjustment range 32 mm; 3-4 positions (depending on height) Load per shelf: useful load when spread out or evenly distributed: 30 kg (thickness 19 mm)/ 50 kg (thickness 25 mm)</p> <p><i>* Melamine shelves cannot accommodate suspension files</i></p> <hr/> <p><u>Metal shelves for W. 1200 mm bookcases and cupboards (swing & sliding door versions)</u></p> <p>Materials: Sheet metal thickness 7/10th mm Thickness: 30 mm Finishes: lower support to take suspended files Adjustment: adjustment range 32 mm between positions; 3-4 positions (depending on height) Load per shelf: useful load when spread out or evenly distributed: 50 kg</p> <p><i>*Only metal shelves can accommodate suspended files.</i></p>
<p>WARDROBE UNIT</p> 	<p>Interior fittings 2/3 wardrobe - 1/3 shelves (3 adjustable shelves) Wardrobe section can be mounted on the right or left 1 fixed top shelf (space 396 mm) Telescopic rod fixed under the top shelf in the depth direction Lock: 2-point lock with 2 locking rods for large doors</p> 
<p>OTHER</p> 	<p><u>Drawer credenza</u> Dimensions: H. 735 x D. 432 x W. 800 mm Runners: 2 Black telescopic metal cradles for suspension files - no back panel Handle: Centre-to-centre distance 96 mm - Dimensions: 136 x 25 mm Choice of 3 colours: Aluminium with an anodised silver finish, Black epoxy (RAL 9005) or White epoxy (RAL 9010) Furniture sold assembled, handles still to be fitted /!\ Distribute the load evenly between the 2 drawers to prevent the furniture from tipping over</p>



DIMENSIONS AND WEIGHT

BOOKCASES AND SWING DOOR CUPBOARDS

Melamine & glass doors

OVERALL DIMENSIONS (in mm)

Depth	432											
Width	800				1000				1200			
Height	735	1135	1335	2021	735	1135	1335	2021	735	1135	1335	2021

USEFUL DIMENSIONS (in mm)

Depth	390											
Width	761				961				1161			
Height	669	1069	1267	1955	669	1069	1267	1955	669	1069	1267	1955
Ringbinder height	2 RH	3 RH	3 RH	5 RH	1 RH*	3 RH	3 RH	5 RH	1 RH*	3 RH	3 RH	5 RH

WEIGHT (in kg)


Weight supported by shelves	30	30	30	30	50	50	50	50	50	50	50	50
-----------------------------	----	----	----	----	----	----	----	----	----	----	----	----

Adjustment

Adjustment between each space: in 32 mm increments.
Compatible with 32 cm high cabinets.

* Specificities: For cabinets W.100/120 x H.735, 2 spaces of 31 and 32 cm (1 HC)
For cabinets W.80 cm H73,5, only 1 HC if a metal shelf for DS is placed

Shelf adjustment range

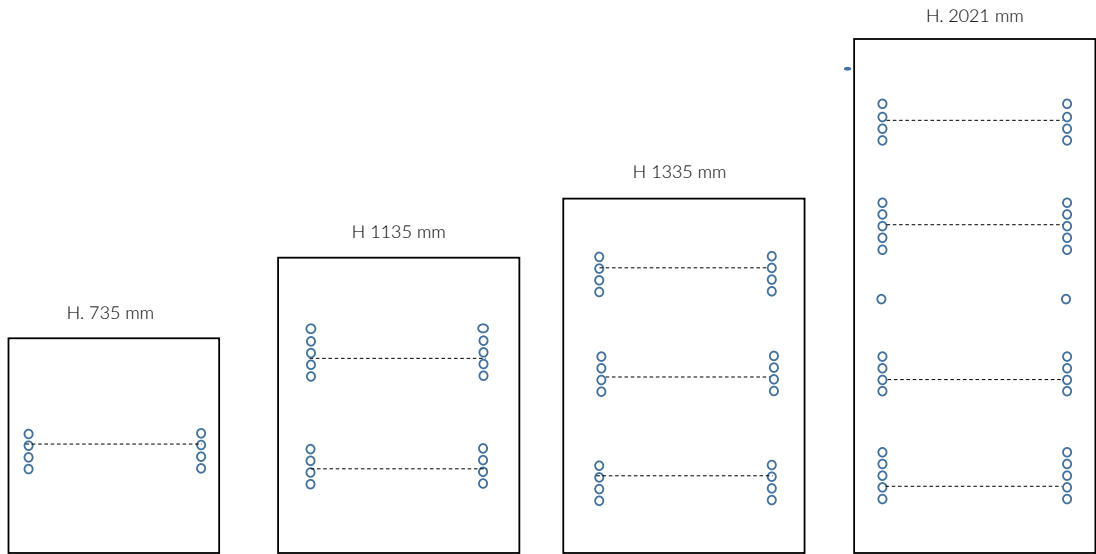

* Attention: on the width 120 mm, some positions are used for fitting hinges. This list is not exhaustive. Other positions can be accessible for the installation of shelves



DIMENSIONS AND WEIGHT

SLIDING DOOR CUPBOARDS

Melamine doors

OVERALL DIMENSIONS (in mm)								
Width	1000				1200			
Depth	432							
Height	735	1135	1335		735	1135	1335	
USEFUL DIMENSIONS (in mm)								
Width	961	961	961		1161	1161	1161	
Depth	360							
Height	669	1069	1267		669	1069	1267	
Ringbinder height	1 RH*	3 RH	3 RH		1 RH*	3 RH	3 RH	
WEIGHT								
Weight supported by shelves	50	50	50		50	50	50	
Adjustment	Adjustment between each space: 32 mm pitch * Special features: For the W.100/120 x H.735 cabinets, 2 spaces of 31 and 32 cm (1 HC)							
Shelf adjustment range	<p>H. 425 - 552 mm H. 735 mm H. 1135 mm H. 1335 mm</p>							
* Note: This list is not exhaustive. Other positions can be accessible for the installation of shelves								

LOW STORAGE UNITS & ROOM DIVIDER UNITS - SLIDING DOORS

Melamine/Altuglas doors

OVERALL DIMENSIONS (in mm)					
Width	1000		1200		1650
Depth	432				
Height	552	552		552	1135 (710 + 425)
Lever-arch file heights (LF)	1 LF	1 LF		1 LF	2 LF 3 LF
Doors	Altuglas		Altuglas		Altuglas Melamine/Altuglas
USABLE DIMENSIONS (in mm)					
Width	961	1161		1522	761 x 2 761 x 2
Depth	360				
Height	375	375		375	1044 (669 + 375) 1444 (1069 + 375)

